

AFX Performance Collimators

Diffraction-limited optics for single mode and ring beam lasers



Features

- Near-diffraction-limited to preserve single-mode beam caustic
- Scanner-optimized configurations for AFX ring beam profiles
- Water cooled for scanning accuracy and minimal focus shift
- Broad range of focal lengths available:
 - 25 mm optics: **F50 to 85 mm**
 - 50 mm optics: **F100 to 160 mm**
- Available accessories: protective window, optical filter, thread adapter, adapter flange for scanner

***n* LIGHT**

nLIGHT AFX Collimators | Product Specifications

Optical		
Parameter	Unit	Typical
Maximum power	kW	2* (within max NA)
Wavelength range	nm	1030 ÷ 1090
Lens diameter	mm	25 or 50
Clear aperture	mm	22 or 47
Lens material	-	High-Quality Fused Silica
Typical power loss	%	< 1
EFL tolerance	%	± 2
Pointing error	mrad	< 3
Focal shift	%Z _R /kW	< 10

Cooling & Environment		
Parameter	Unit	Typical
Operating temperature	°C	5 ÷ 40
Relative humidity	%	< 90 non-condensing
Storage temperature	°C	-20 ÷ 70
Thermo-switch	°C	70 ± 5 (reset < 30)
Minimum water flow	l/min	1
Recommended water flow	l/min	1.5
Maximum pressure	bar	4
Maximum pressure drop [§]	bar	0.4
Water temperature	°C	20 ÷ 35 (above dew point)
Water quality	-	Filtered clean water (< 100 µm) with or without glycol
Water pipe ID/OD	mm	4/6

* Higher power possible upon request

§ Measured @1.0 l/min

Mechanical Specifications with QBH Fiber Interface [‡]				
Focal Length	F50, F60	F70, F75, F85	F100, F120	F160
Length	143.5 mm	167.5 mm	217.7 mm	246 mm
Clamping diameter	∅ 36 mm g8	∅ 36 mm g8	∅ 65 mm g8	∅ 65 mm g8
Weight	0.9 kg	1.1 kg	1.6 kg	1.8 kg
Max diameter [*]	43 mm	43 mm	65 mm	65 mm


‡ QD fiber connector available upon request

* Excluding water fittings

COLLIMATED BEAM TAILORING

- Matches the aperture of scanner or customer device
- Prevents heating of downstream devices
- Discrete set of collimated beam diameters

nLIGHT AFX Collimators | Technical Drawings

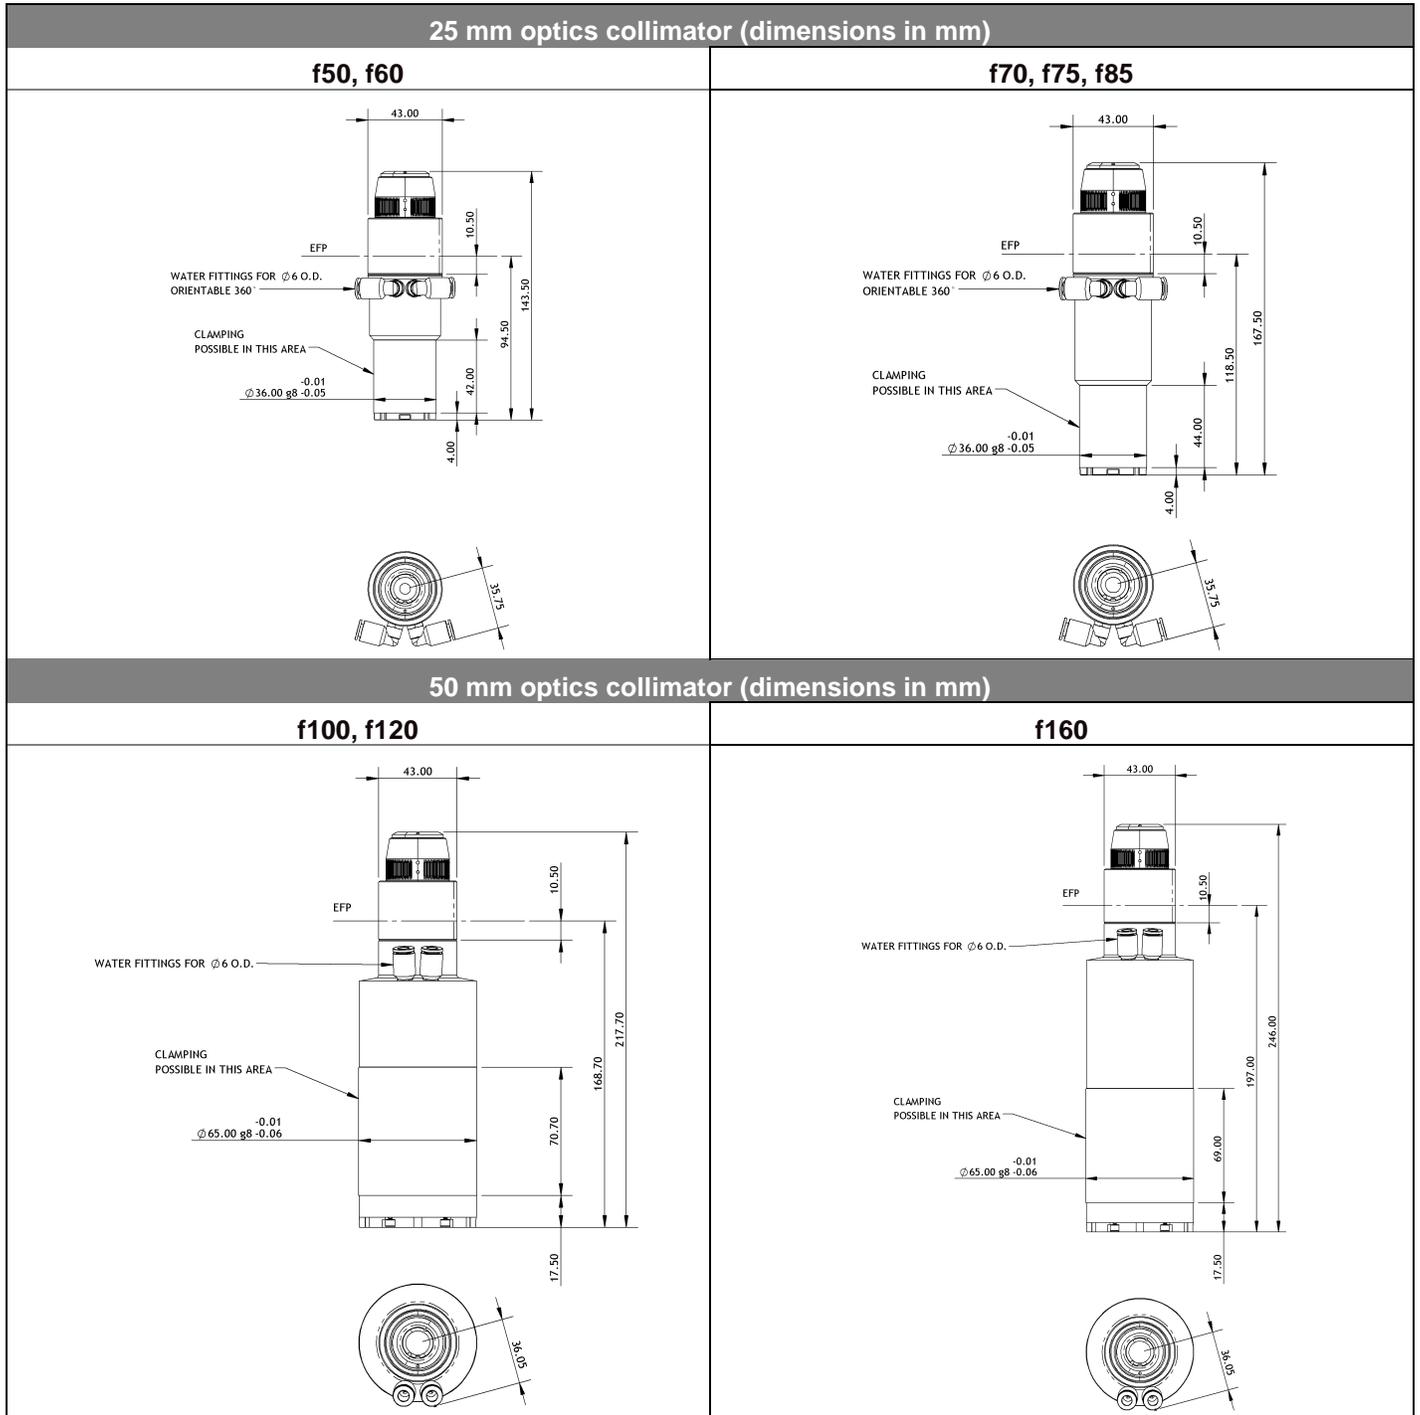

nLIGHT AFX Collimators | Accessories

PROTECTIVE WINDOW

- Protects the *Collimator* from dust, smoke and debris
- Attached to the distal end of the *Collimator*
- Easy to install and replace

Optical		
Parameter	Unit	Typical
Maximum power	kW	2* (within max NA)
Wavelength range	nm	1030 ÷ 1090
Window diameter	mm	25 or 50
Material	-	High-Quality Fused Silica
Typical power loss	%	< 0.5
Focal shift	%Z _R /kW	< 5

*Higher power possible upon request

OPTICAL FILTER

- Filters out > 99.5% in the range 1110 ÷ 1200 nm
- Protects the *Collimator* from dust, smoke and debris
- Attached to the distal end of the *Collimator*
- Easy to install and replace

Optical		
Parameter	Unit	Typical
Maximum power	kW	2 (within max NA)
Transmitted wavelength range	nm	1030 ÷ 1090
Rejection (1110 ÷ 1200 nm range)	%	> 99.5
Filter diameter	mm	25 or 50
Material	-	High-Quality Fused Silica
Typical power loss (@ 1064 nm)	%	< 1
Focal shift	%Z _R /kW	< 15


THREAD ADAPTER

- M30 x 0.75 (25 mm version) or M58 x 1.0 (50 mm version) thread
- Attached to the distal end of the *Collimator*
- Easy to install and replace
- Pointing error: < 1.5 mrad

ADAPTER FLANGE FOR SCANNERS

Custom flanges for attaching the *Collimator* to scanner heads or customer devices. More information upon request.

nLIGHT AFX Collimators | Accessories Technical Drawings

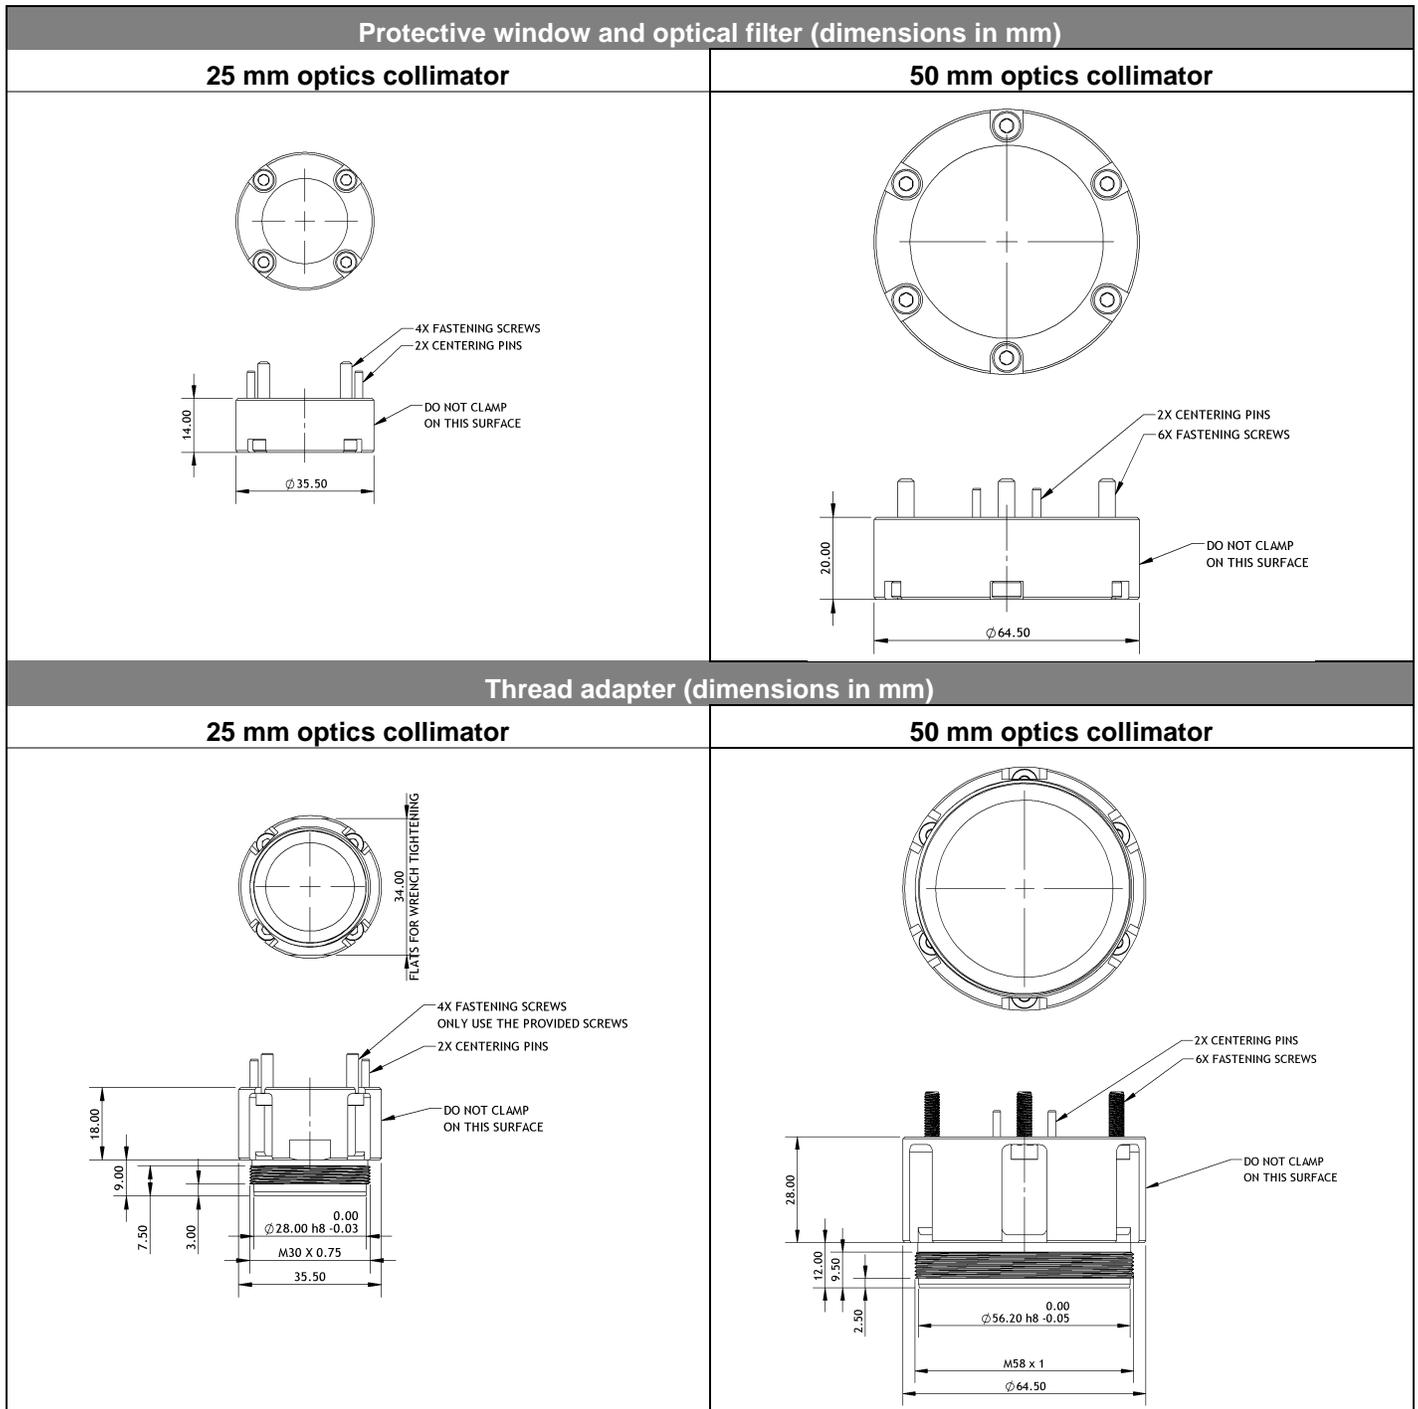

VISIBLE AND INVISIBLE LASER RADIATION
AVOID EYE OR SKIN EXPOSURE TO DIRECT OR SCATTERED RADIATION
CLASS 4 LASER PRODUCT



nLIGHT continually improves its products to provide customers outstanding quality and reliability. The information contained herein is subject to change without notice. nLIGHT, Inc. shall not be liable for technical or editorial errors or omissions contained herein. Warranties are set forth in express warranty statements accompanying products. Nothing herein should be construed as constituting an additional warranty. For details, please contact your nLIGHT sales representative.

sales@nlight.net | www.nlight.net

© Copyright 2019 nLIGHT, Inc.